

Wideband RF Power Amplifier CRF-PA-7000M9000M-50W	Frequency Range 7,000 – 9,000 MHz	Connector N-Female
	Rated Output Power 50 W	Package Size 483 × 432 × 147 mm


Electrical Characteristics

Test conditions: 50Ω system, unless otherwise specified.

Parameter	Min	Typ	Max	Units
Frequency Range		7,000 – 9,000 MHz		
Gain	47			dB
Gain Flatness	-4		4	dB
Adjustable Gain			20	dB
Input VSWR			2 : 1	
Input Power			0	dBm
Rated Output Power	50			W
Power Supply		AC 220 V ±10%, 50/60 Hz		
Harmonics			-15	dBc
Spurious			-60	dBc
RF Connectors In/Out		Input: N-Female Output: N-Female		
Control Interface		RS485 / LAN		
Dimensions		483 × 432 × 147 mm		
Size		19", 3U		
Test conditions		50		Ω
Operating Temperature	0		50	°C
Cooling Method		Forced air cooling		
Application		Test & measurement / communication / interference / aviation control		
Notes		Built-in protection: over-voltage, over-temperature, over-drive and VSWR. Control: RS485 / LAN.		

Mechanical Outline

Complete outline drawing shown below for clear integration reference.

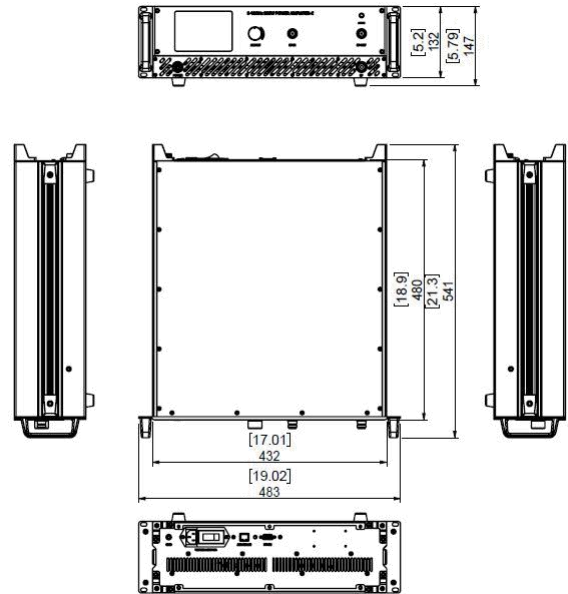

Model CRF-PA-7000M9000M-50W	Package Size 483 × 432 × 147 mm	Gain 47dB
Connector Reference RF IN: N-Female RF OUT: N-Female Control: RS485 / LAN	Power / Cooling Supply: AC 220 V ±10%, 50/60 Hz Cooling: Forced air cooling	Release Note Mechanical drawing is provided for installation reference. Final dimensions are subject to the production unit.

Applications Test & measurement / communication / interference / aviation control	Customization Optional forward/reverse power monitoring, GPIB control interface and LAN remote control are available.
---	---

Compliance / Quality Framework

RoHS Compliant	CE / FCC	ISO 9001	GJB 9001C
----------------	----------	----------	-----------

Test data and pattern files can be supplied for project review where applicable.